


Normally-Closed Spool Cartridge Valve

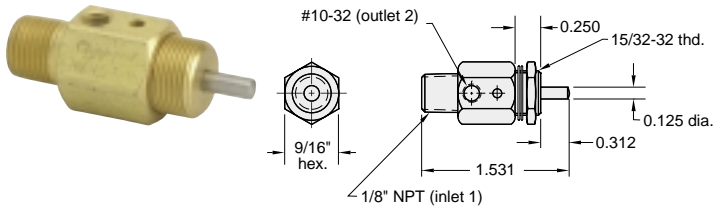

Input Pressure: 150 psig max.

Air Flow: 6 SCFM @ 50 psig; 100 SCFM @ 100 psig


Force For Full Stem Travel: 32 oz. nominal

Mounting: 15/32-32 thread. Nut and lockwasher furnished.



Part No.	Description
MAVO-2P . . .	Normally-Closed Spool Cartridge Valve

J-Series Cartridge Valves

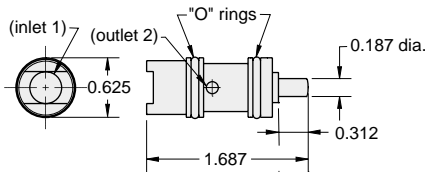


Input Pressure: 300 psig

Air Flow: 3.0 SCFM @ 50 psig; 6.0 SCFM @ 100 psig

Force For Full Stem Travel: 24 oz. nominal



Mounting: Inserts into a 3/8" bore (0.375" ±0.001")

Note: See page 118 for mounting details



Part No.	Description
MJV-2C . . .	Normally-Closed Poppet Cartridge Valve
MJVO-2C . . .	Normally-Open Poppet Cartridge Valve

J-Series Miniature Poppet Valves

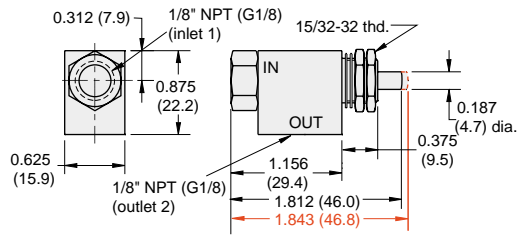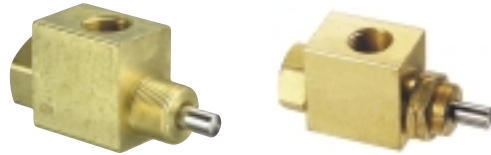

Input Pressure: MJV-2/MJV-2-MG - 300 psig/21 bar max.


MJVO-2/MJVO-2-MG - 150 psig/10 bar max.

Air Flow: MJV-2/MJV-2-MG - 14.0 SCFM @ 50 psig;

25 SCFM @ 100 psig; 600 l/min @ 6 bar

MJVO-2/MJVO-2-MG - 7 SCFM @ 50 psig;

12 SCFM @ 100 psig; 600 l/min @ 6 bar



Force For Full Stem Travel: MJV-2/MJV-2-MG - 38 oz. nominal


MJVO-2/MJVO-2-MG - 36 oz. nominal

Mounting: 15/32-32 thread. Nuts and lockwashers furnished.

Part No.	Description
MJV-2	Normally-Closed Poppet Valve, 1/8" NPT
MJV-2-MG . . .	Normally-Closed Poppet Valve, G1/8
MJVO-2	Normally-Open Spool Valve, 1/8" NPT
MJVO-2-MG . . .	Normally-Open Spool Valve, G1/8

CAPTIVATED PUSH BUTTONS

The small compact size make the push buttons adaptable to panel mounting. Unlike set screw retained buttons, the screw-on design will not allow the button to fall off. Designed to work with Clippard MAV, MJV, and FV series valves, these buttons also help protect the valve by preventing over-traveling of the stem and the potential for side-load on the valve. See page 135 for more information.

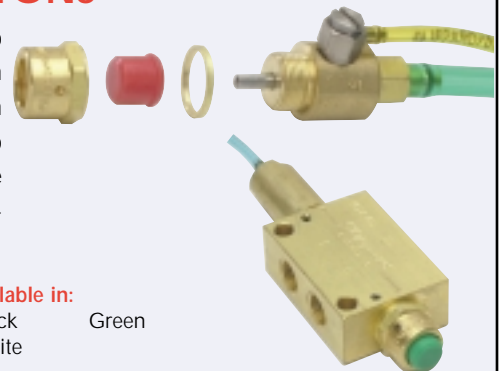

Button Housing Available in:

Black Chrome Nickel Plated
Brass

Button Colors Available in:

Yellow Black Green
Red White