


# 1/2" BORE STAINLESS STEEL CYLINDER



**SDD-08-□-□**

Double Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Double Rod      **Maximum Stroke:** 20"      For B option add 0.500  
**Options:** M, B, V, P6, P7, P8, N, W      For M option add 0.312

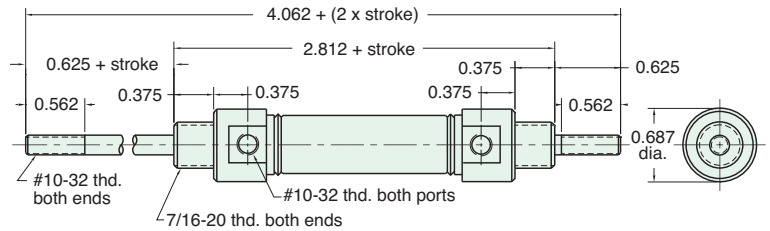


Nuts included, but not shown on drawing

**SRR-08-□-□**

Reverse Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 2 lbs. **Spring At Rest:** 0.9 lbs.  
**Options:** M, B, H, V, N, W      **Maximum Stroke:** 15"      For B option add 0.500  
 For M option add 0.312

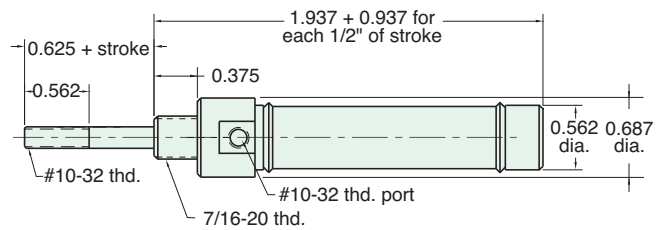


Nut included, but not shown on drawing

**URR-08-□-□**

Reverse Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 2 lbs. **Spring At Rest:** 0.9 lbs.  
**Options:** M, B, H, V, P2, P3, P4, P5, P6, P7, P8, N, W      **Maximum Stroke:** 15"      For B option add 0.500  
 For M option add 0.312

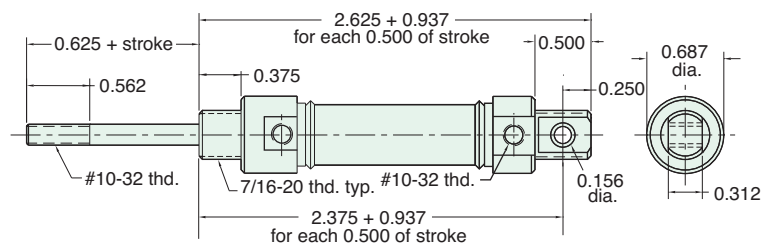

Furnished without nut(s). See Chart on [Page 14](#).

Did you know that all Clippard Cylinders are 100% tested.