

NEW! 9/16" BORE STAINLESS STEEL CYLINDER




USN-09-□-□

Single Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: B, V, P6, N, M, MB **Maximum Stroke:** 23" For B option add 0.063
 For M or MB option add 0.125

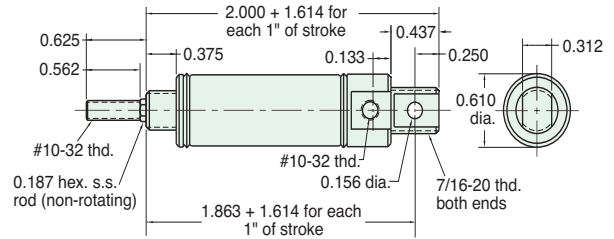


Furnished without nut(s). See Chart on [Page 17](#).

USR-09-□-□

Single Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: B, V, P6, N, M, MB **Maximum Stroke:** 23" For B option add 0.063
 For M or MB option add 0.125

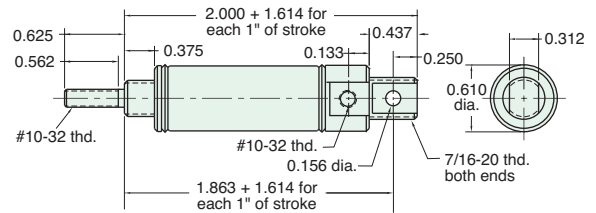


Furnished without nut(s). See Chart on [Page 17](#).

SSN-09-□-□

Single Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: B, V, N, M, MB **Maximum Stroke:** 23" For B option add 0.063
 For M or MB option add 0.125

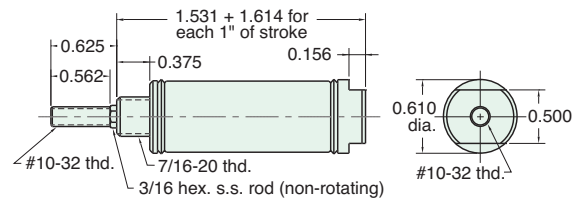


Nut included, but not shown on drawing

SSR-09-□-□

Single Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: B, V, N, M, MB **Maximum Stroke:** 23" For B option add 0.063
 For M or MB option add 0.125

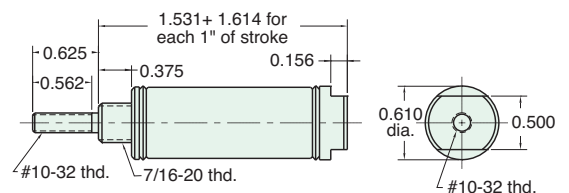

Nut included, but not shown on drawing