


# 3/4" BORE STAINLESS STEEL CYLINDER



## SRR-12-□-□

Reverse Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, W, V, N      **Maximum Stroke:** 16"      For B option add 0.375  
 For M option add 0.125

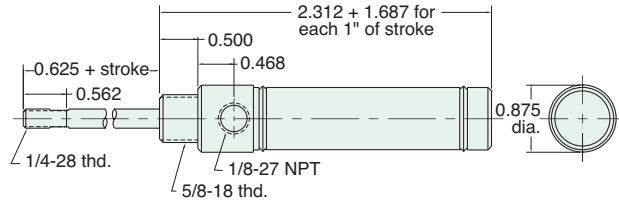


Nut included, but not shown on drawing

## URR-12-□-□

Reverse Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, W, V, P2, N, W **Maximum Stroke:** 15"      For B option add 0.500  
 For M option add 0.125

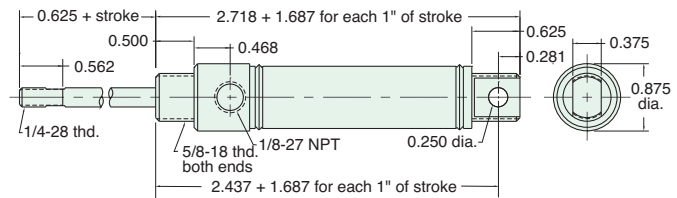


Furnished without nut(s). See Chart on Page 27.

## SFD-12-□-□

Double Acting, Spring Bias

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Double Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, W, V, P6, P7, P8, N      **Maximum Stroke:** 15"      For B option add 0.375

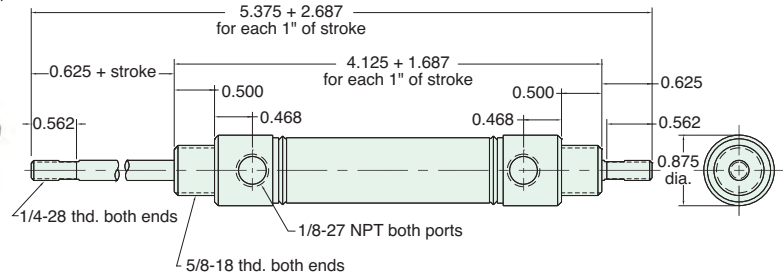


Nuts included, but not shown on drawing

## SBR-12-□-□

Double Acting, Rear Spring Bias

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, W, V, P6, P7, P8, S, N      **Maximum Stroke:** 15"      For B option add 0.375  
 For S option add 0.437

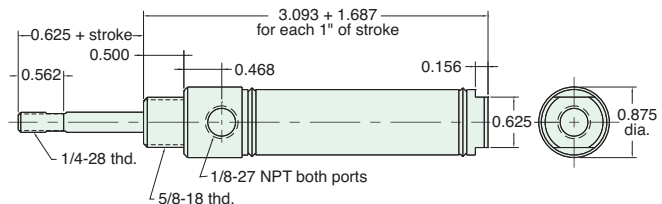

Nut included, but not shown on drawing