SFR-12-❑-❑

Double Acting, Front Spring Bias

Mount: Stud **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Rotating Rod **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.
Options: M, B, H, W, V, P6, P7, P8, S, N **Maximum Stroke:** 25″
For B option add 0.375
For S option add 0.437

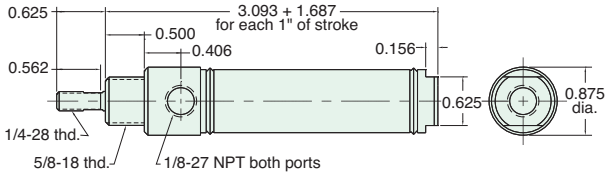

Nut included, but not shown on drawing

UBR-12-❑-❑

Double Acting, Rear Spring Bias

Mount: Universal **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Rotating Rod **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.
Options: M, B, H, W, V, P2, P3, P4, P5, P6, P7, P8, N **Maximum Stroke:** 15″
For B option add 0.375

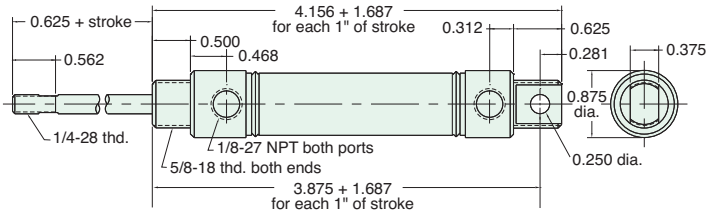

Furnished without nut(s). See Chart on Page 27.

UFR-12-❑-❑

Double Acting, Front Spring Bias

Mount: Universal **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Rotating Rod **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.
Options: M, B, H, W, V, P2, P3, P4, P5, P6, P7, P8, N **Maximum Stroke:** 24″
For B option add 0.375

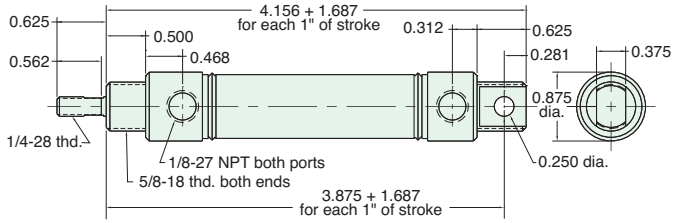

Furnished without nut(s). See Chart on Page 27.

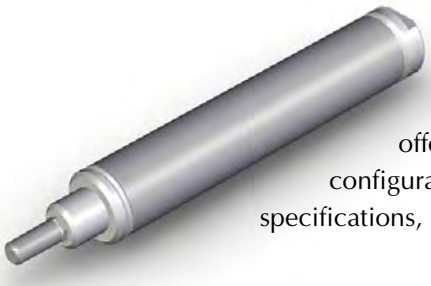

CAD 2D & 3D Models Available

2D & 3D CAD models of all Clippard stainless steel cylinders are available via www.clippard.com/cylinders/. A wide range of formats are offered for your convenience. Clippard's on-line, state-of-the-art cylinder configurator allows users to build their own cylinder exactly to the required specifications, and then view the details, drawings, CAD models, pricing and much more!

www.clippard.com/cylinders/