



1 1/4" BORE STAINLESS STEEL CYLINDER

Note: The 1 1/4" bore is also available with a 7/16-20 threaded rod. Order -LR option.


SSN-20-[]-[]

Single Acting



Mount: Stud	Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod	Spring Compressed: 10 lbs. Spring At Rest: 4.5 lbs.
Options: M, B, H, V, S, N	Maximum Stroke: 23"

For M option add 0.125
For S option add 0.312

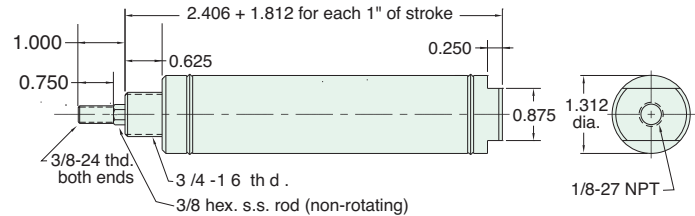

Nut included, but not shown on drawing


SSR-20-[]-[]

Single Acting



Mount: Stud	Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod	Spring Compressed: 10 lbs. Spring At Rest: 4.5 lbs.
Options: M, B, H, V, S, N	Maximum Stroke: 23"

For M option add 0.125
For S option add 0.312

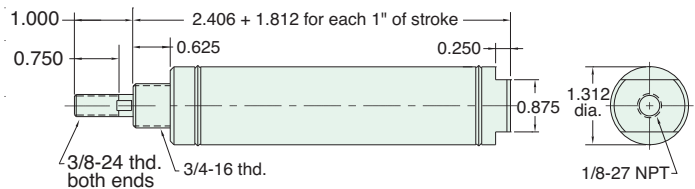

Nut included, but not shown on drawing


USN-20-[]-[]

Single Acting



Mount: Universal	Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod	Spring Compressed: 10 lbs. Spring At Rest: 4.5 lbs.
Options: M, B, H, V, P6, N	Maximum Stroke: 22"

For M option add 0.125

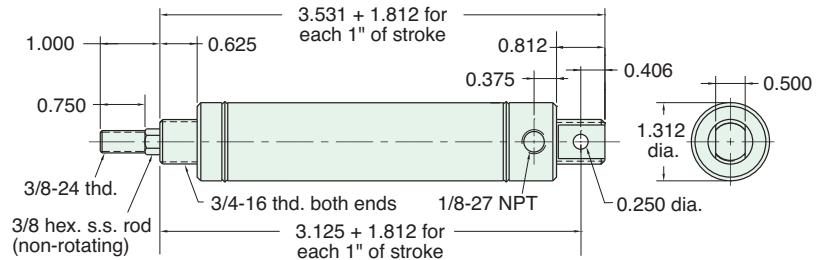

Furnished without nut(s). See Chart on [Page 41](#).


USR-20-[]-[]

Single Acting



Mount: Universal	Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod	Spring Compressed: 10 lbs. Spring At Rest: 4.5 lbs.
Options: M, B, H, V, P6, N	Maximum Stroke: 22"

For M option add 0.125

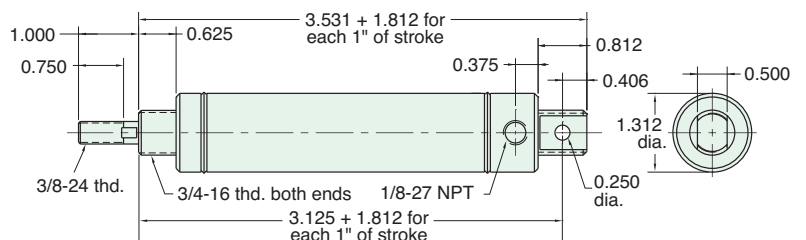

Furnished without nut(s). See Chart on [Page 41](#).