


# 1 1/2" BORE STAINLESS STEEL CYLINDER



## FSR-24-□-□

Single Acting


**Mount:** Front      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, V, S, N, W      **Maximum Stroke:** 24"      For M option add 0.125  
 For S option add 0.187

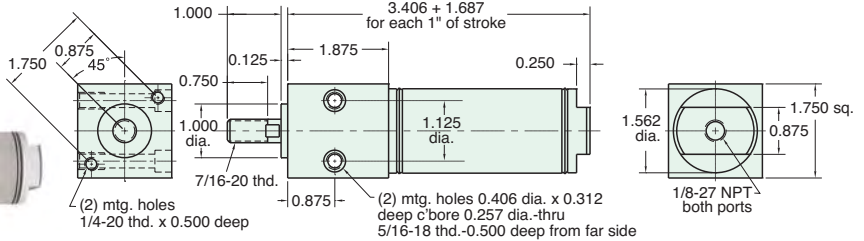

## SSN-24-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, V, S, N      **Maximum Stroke:** 24"      For M option add 0.125  
 For S option add 0.187

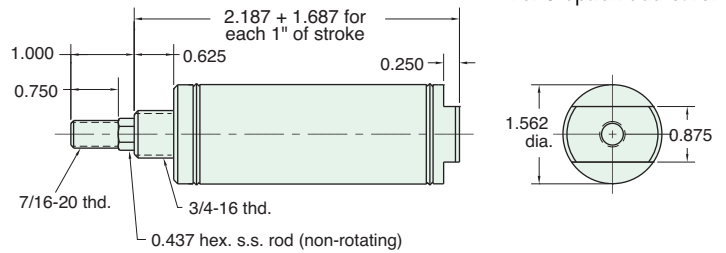


Nut included, but not shown on drawing

## SSR-24-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, V, S, N, W      **Maximum Stroke:** 24"      For M option add 0.125  
 For S option add 0.187

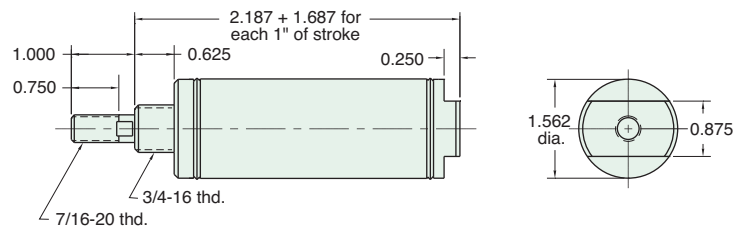

Nut included, but not shown on drawing

## TSR-24-□-□

Single Acting

**Mount:** Trunnion      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, V, S, N, W      **Maximum Stroke:** 23"      For M option add 0.125  
 For S option add 0.187

