




# 2" BORE STAINLESS STEEL CYLINDER

## SBR-32-□-□

Spring Bias



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** M, B, W, V, P6, P7, P8, S, N      For S option add 0.375

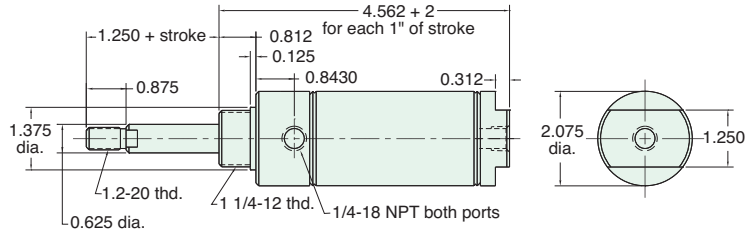


Nut included, but not shown on drawing

## UFR-32-□-□

Spring Bias



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** M, B, W, V, P2, P3, P4, P5, P6, P7, P8, N

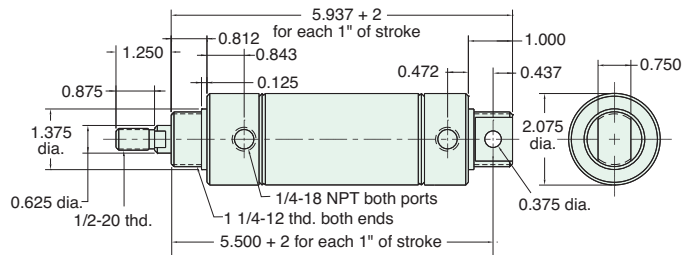


Furnished without nut(s). See Chart on Page 57.

## UBR-32-□-□

Spring Bias



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** M, B, W, V, P2, P3, P4, P5, P6, P7, P8, N

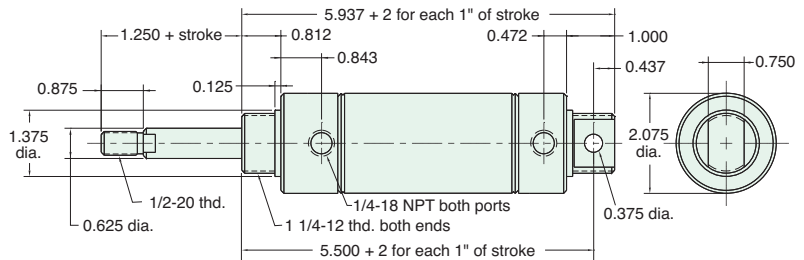

Furnished without nut(s). See Chart on Page 57.

## CUSTOMer solutions

If you need a product that fits your application perfectly, Clippard has the capability to design or modify one of its products to suit your exact needs. We understand that a standard catalog product may be close but not be exactly what you need. **Let us know YOUR Need, and we will help to find YOUR Solution!**

### Custom Cylinders

"Twice the force in half the size" was the goal for one custom cylinder. Multiple cylinder positions, or multiplied force can be achieved with this design.

