





10 MM MINIATURE VALVES


In-Line Connector with LED

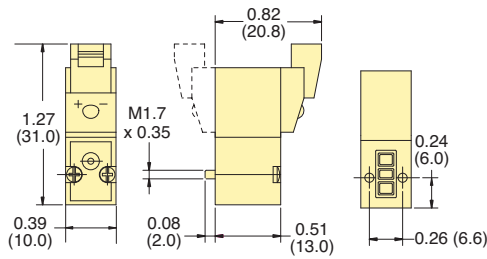


90° Connector with LED




Wire Leads



Typical Air Flow

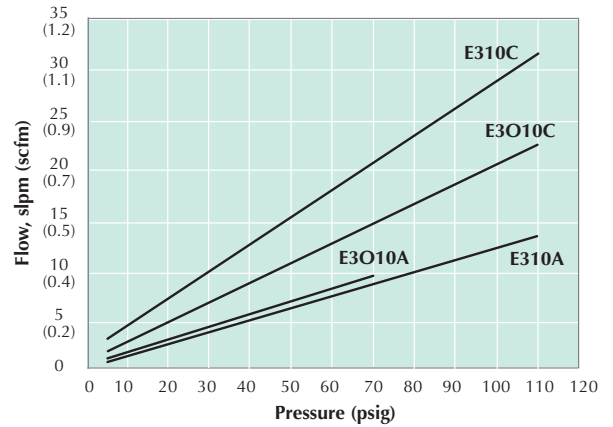

Mounting Interface

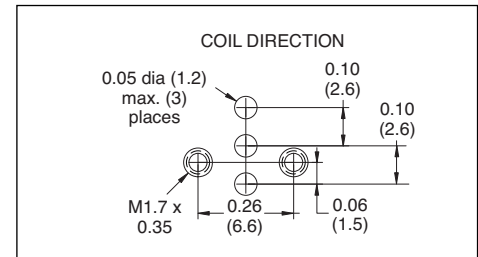

Connectors

Wire Connector must be ordered separately. 24 AWG. Stranding 7/32.




Part No.

- C2A-RB300 Connector with Cable, 11.8" (300 mm)
- C2A-RB500 Connector with Cable, 19.69" (500 mm)
- C2A-RB1000 Connector with Cable, 39.37" (1,000 mm)

Molex terminal insert #050013-8000, #28139 plug and 24 AWG wire.



Custom plugs, wire lengths, connectors and flavors are available for your specific requirements. Call for details.

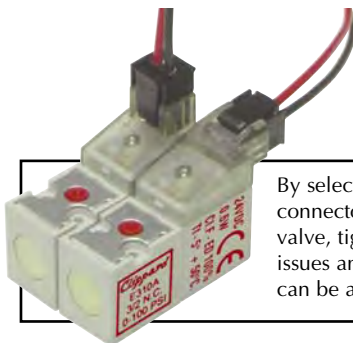

By selecting the appropriate connector type for your 10 mm valve, tight spaces, orientation issues and electrical requirements can be accommodated easily.

Another feature of the Clippard 10 mm valve is the ability to detach the coil and connector from the valve body. This can be useful for the purpose of orientating the coil by 180°, or exchanging connector types or voltages.

