





# MINIMATIC® J-SERIES QUICK CONNECT FITTINGS

## Caps with Open Flow Path


Minimatic J-Series quick connect fittings are ideal for use in jigs, fixtures, feeding devices, logic control circuitry and automatic or semi-automatic machinery. Assembly is simple, and the tightening of the knurled cap assures a positive, leakproof, high pressure connection that will stay connected.




**Part No.** MIQC-CB4 **Description**  
1/8" Barb




**Part No.** MIQC-CFT **Description**  
#10-32




**Part No.** MIQC-CPF **Description**  
3/8" Thread

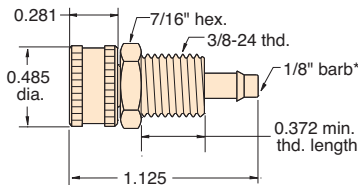

**Part No.** MIQC-CPB **Description**  
1/8" Barb  
*(supplied with mounting nut and two washers)*




**Part No.** MIQC-CMP **Description**  
1/8" NPT




**Part No.** MIQC-CMQ **Description**  
1/4" NPT

## Valve Bodies with Shut-Off Valve


Minimatic J-Series quick connect fittings are very compact yet provide a high flow of 14 scfm @ 100 psig. The electroless nickel plated brass body is available with #10-32 threads (M or F), 1/8" NPT threads (M or F), 1/4" NPT threads (M) or a 1/8" hose single barb configuration that is ideal for use with Clippard URH1-0804 polyurethane hose.

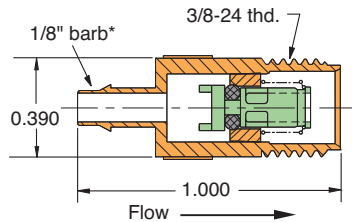


**Part No.** MIQC-VB4 **Description**  
1/8" Barb, 3/8-24 Thd.

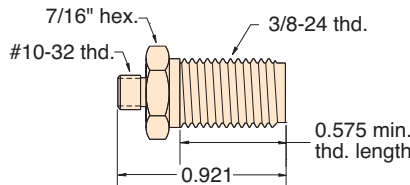


**Part No.** MIQC-VMT **Description**  
#10-32 Male, 3/8-24 Thd.  
*(supplied with mounting nut and two washers)*

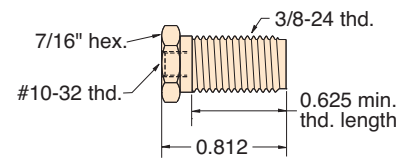


**Part No.** MIQC-VFT **Description**  
#10-32 Female, 3/8-24 Thd.  
*(supplied with mounting nut and two washers)*



**Part No.** MIQC-VFP **Description**  
1/8" NPT Female, 3/8-24 Thd.



**Part No.** MIQC-VMQ **Description**  
1/4" NPT Male, 3/8-24 Thd.

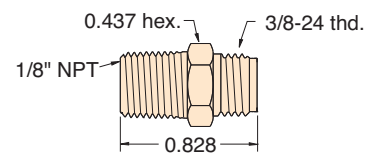

**Part No.** MIQC-VMP **Description**  
1/8" NPT Male, 3/8-24 Thd.

\*1/8 Barb - fits 1/8" I.D. hose. Ideal for use with Clippard URH1-0804 polyurethane hose.